

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

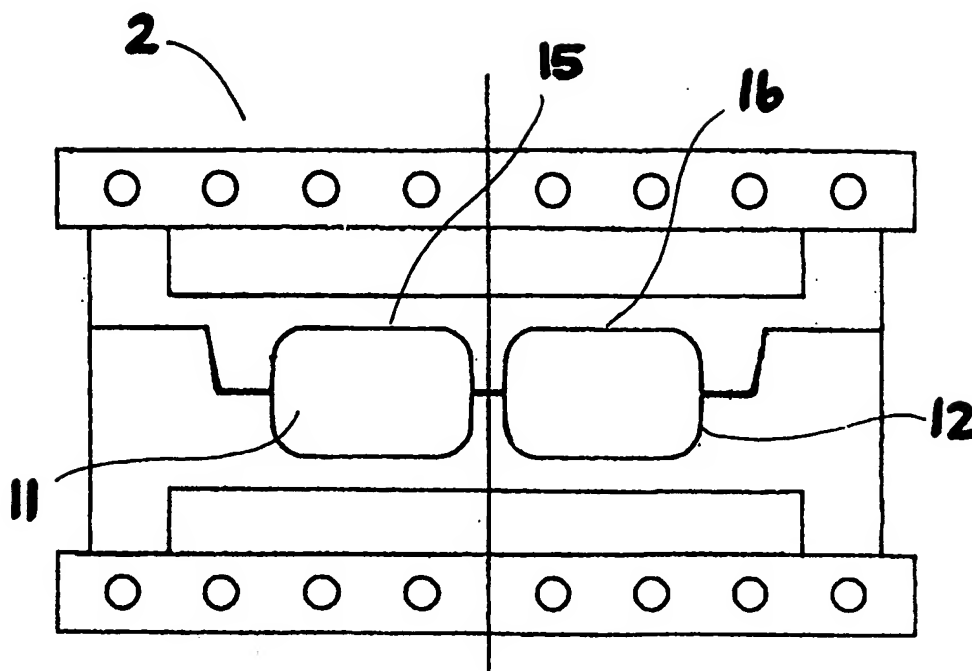
**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A63B 59/12</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/17845</b> (43) International Publication Date: 15 April 1999 (15.04.99)
<p>(21) International Application Number: PCT/NO98/00283</p> <p>(22) International Filing Date: 23 September 1998 (23.09.98)</p> <p>(30) Priority Data: 974578 3 October 1997 (03.10.97) NO</p> <p>(71) Applicant (for all designated States except US): MADSHUS A/S [NO/NO]; N-2820 Biri (NO).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): BJERTNÆS, Gunnar [NO/NO]; Rådystien 31, N-2600 Lillehammer (NO).</p> <p>(74) Agent: HELGERUD, Jan, E.; Bryns Patentkontor a/s, P.O. Box 765, Sentrum, N-0106 Oslo (NO).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report.</p>	

(54) Title: METHOD OF MANUFACTURING A STICK SHAFT



## (57) Abstract

A method of manufacturing a player's stick for use, e.g., in ice hockey, bandy, field hockey or rollerblade hockey, wherein a core material consisting of wood or foam is enveloped by a shell of plastic, characterised in that the shell consisting of parts has colour and/or design patterns applied thereto whilst the parts are flat and before they envelop the core and are joined together.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD OF MANUFACTURING A STICK SHAFT

The invention relates to a method of manufacturing a player's stick. The stick can be used in various activities and sports such as field hockey, street hockey (rollerblade  
5 hockey), ice hockey or bandy.

To be more specific, the invention relates to a stick having a shaft consisting of a core which, e.g., may be made of wood or a polyurethane material. The core of thermoset plastic and optional fibres is enveloped by a sheath of a plastic material on which a  
10 pattern or decoration has been printed beforehand. The printing is carried out in the form of reversed or mirror printing on the reverse side by means of, e.g., silk-screen printing or sublimation printing (transfer printing). The sheath of plastic material is printed with colour, text or patterns on the reverse side whilst it is still flat. This means that the printed pattern will be extremely well protected by the actual plastic material.

15 Traditionally, sticks made of wood and possibly reinforced portions of glass fibre are used in the aforementioned sports. These wooden sticks are often made as laminates in time-consuming and complex processes. This means that the sticks are costly. A second factor is that the wooden sticks are liable to break and splinter, and a broken  
20 stick represents a danger to the safety of the players. Nor do the traditional sticks allow such extensive possibilities for design, print, patterns and colours as in the present invention.

A number of methods for manufacturing sticks of synthetic materials are also known,  
25 but none of the sticks have become widespread or accepted in the market. There are several reasons for this lack of acceptance, including price, quality and appearance, as well as properties such as cushioning, shaft smoothness and resilience, which are very different from the characteristics of the traditional wooden sticks with surface properties such as splintering and chipping. The new invention enhances safety among the  
30 players, gives the sticks better useful qualities and a longer active life. Above all, the invention provides the possibility of furnishing the sticks with special colours and designs.

As examples of known methods of manufacturing synthetic sticks, reference may be  
35 made to the following:

WO 82/03789 describes a method of making an ice hockey stick, wherein:

- 1) a core of polyurethane foam is formed and cured;
- 2) the blade portion of the core is perforated and several holes are drilled in the handle portion of the core;
- 5 3) each groove is filled with a strip of glass fibre-reinforced polyester;
- 4) glass fibre is applied to the reinforced core;
- 5) an outer layer of polyester-woven injection moulding is formed.

US 5217221 teaches an ice hockey stick consisting of a core of foamed plastic (24)  
10 covered with a glass fibre layer (20) and an outer layer of preformed wood veneer (16) impregnated with resin.

EP 172564 relates to a bat or an ice hockey stick which is made by covering a core of wood or synthetic fibres with a plastic shell. Parts of the stick are enveloped by glass  
15 fibre tapes to improve/increase its mechanical strength. The stick can be painted or stained, if so desired.

US 4013288 teaches a hockey stick which consists of a core of foamed nylon mixed with glass fibre. The stick is made by injection moulding and subsequent surface  
20 treatment.

These methods show different ways of manufacturing sticks, but none disclose sticks to which colours, designs or decorations can be applied with the aid of reverse printing technique. By using a technique of this kind, it will be possible to make sticks where  
25 the pattern or design is protected by an enveloping material.

The actual printing technique can be carried out efficiently in more controlled forms. This increases the possibility of using, e.g., four-colour printing technique and ornamentation of the whole stick shaft. This permits great flexibility so that, e.g.,  
30 advertising can be introduced into the product. Similarly, the sticks can be decorated with club logos and the colours of a particular team. Thus, the product will have a distinctive appearance compared with today's sticks, inasmuch as the whole shaft can be decorated, whilst market flexibility and production management will be easier. (Product variants do not need to be stored temporarily prior to decoration, as the film is printed  
35 independently.) The shaft surface will be hard-wearing. Applied text will not be worn away. The shaft will be more impact-resistant, thereby reducing the problems caused by cracks, chipping and splintering. This enhances the players' safety as fibres and chips.

do not become detached and lie on the ice. Nor will the product become sharp or splintered, which may be dangerous when player meets player in a match or training situation. The useful life of the product will be prolonged. The product will be better in that shaft friction can be adjusted and the shaft can be cushioned.

5

The invention will now be explained in more detail, with the aid of drawings, wherein:

Figure 1 is a cross-sectional view of a stick shaft;

Figure 2 shows a tool for enveloping the shaft around the core material;

10 Figure 3 shows an embodiment which discloses the varying sectional profile of the shaft.

In the present method for, e.g., making an ice hockey stick 1 a core material 11 is enveloped by a film material. The core 11 may, e.g., be made of polyurethane foam or  
15 wood. A plastic material is used as shell 12. The shell consists of several parts which together are complementary to the core. The thickness of the shell may be from 0.1 to 1 mm, preferably 0.2 to 0.35 mm. A thermoset plastic 13, e.g., epoxy, and optional fibres may be applied around the core to reinforce the shaft. Figure 2 shows a tool 2 for placement of plastic shells/film/plastic films, preferably two, each in its own mould  
20 cavity 15, 16, which are to envelop the shaft. These plastic shells/films consist of thermoplastic which is thermoformable and transparent. Here, the material may, for example, be a blend of TPU and ABS. The surface should have the correct friction, be impact-resistant and be prevented from cracking and becoming splintered or having sharp edges. TPU has elastifying and friction-modifying properties. Adjustments can  
25 be made for smoothness of the shaft. Before the material is moulded into a shell, print is applied to the material (the film) whilst it is still flat. This permits the application of print onto the product using known methods ("flat print methods"), which gives rise to great flexibility and accurate printing, independent of the finished product's appearance. The printing may be automated and followed by a rapid drying process. The shell parts  
30 are pressed together, each in its respective half of the mould. Cores of thermoset plastic and optional reinforcing fibres are placed between the shells, and the whole unit remains under pressure and heat in closed state until fully hardened (20 minutes). The final shape of the product is made in the tool, and all the components are bonded together with the aid of the thermoset plastic. The finished shaft is taken out of the mould and  
35 then all bits projecting from the sides of the shaft are trimmed away.

Before the shell parts are joined together with the core so that together they become a robust unit, colour or a design is applied to the shell parts. This application takes place with the aid of reverse side printing or sublimation printing. In this method, as the name suggests, the colour is applied on the reverse side. This means that designs and colours  
5 are extremely well protected by the surrounding shell layer. From a printing-technical point of view, the method also gives advantages over traditional printing, where the colours are applied on the outside and are thus more susceptible to damage and wear.

The core can be endowed with particular properties through the choice of material in the  
10 actual core, and it can be reinforced with, e.g., glass fibre yarn or the like.



P a t e n t   c l a i m s

1.

A method of manufacturing a player's stick for use, e.g., in ice hockey, bandy, field  
5 hockey or rollerblade hockey, wherein a core material consisting of wood or foam is  
enveloped by a shell of plastic, characterised in that the shell consisting of parts has  
colour and/or design patterns applied thereto whilst the parts are flat and before they  
envelop the core and are joined together.

10 2.

A method according to claim 1, characterised in that the colour application takes place  
by means of reversed or mirror printing on the reverse side by means of sublimation  
printing or silk screen printing.

15 3.

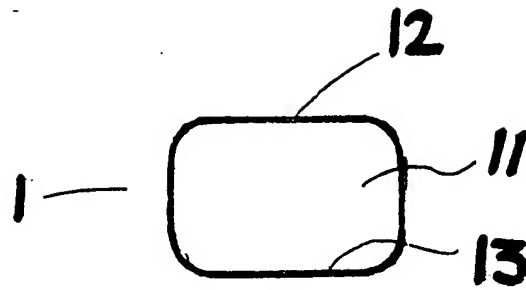
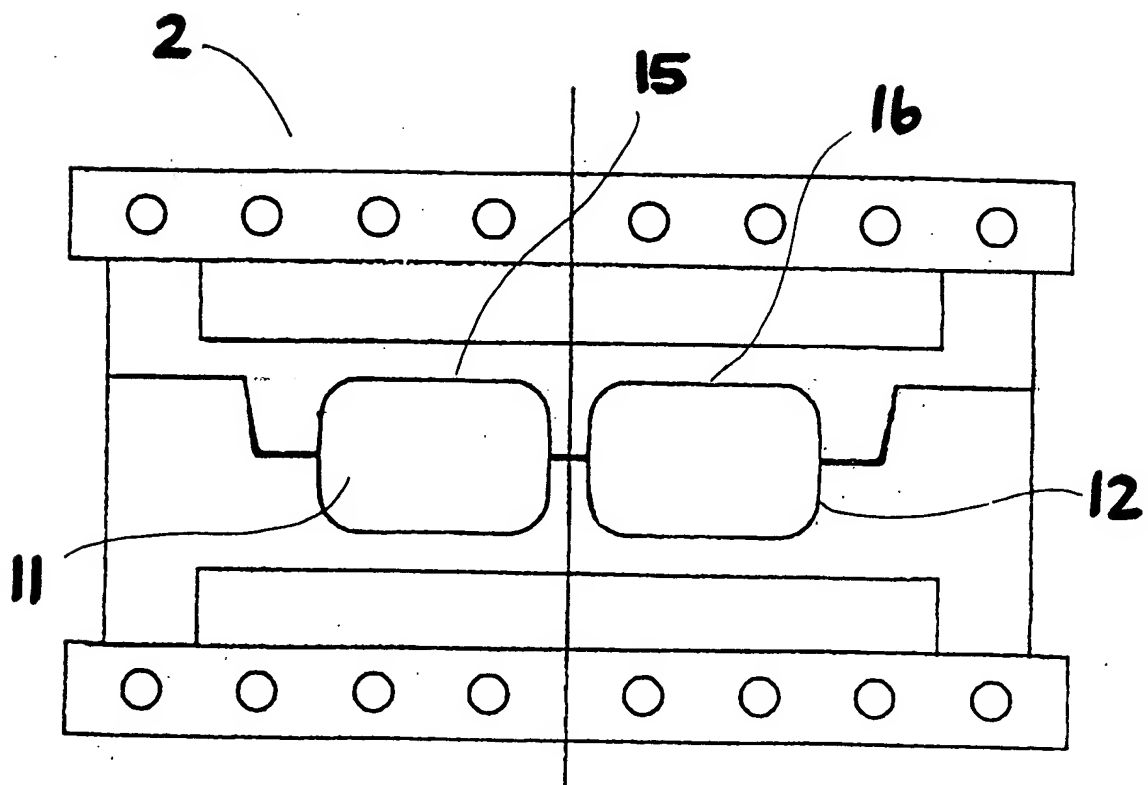
A method according to claims 1-2, characterised in that joining the core material and the  
shell parts takes place in a temperature range of from +10°C to 20°C, preferably from  
20°C to 100°C.

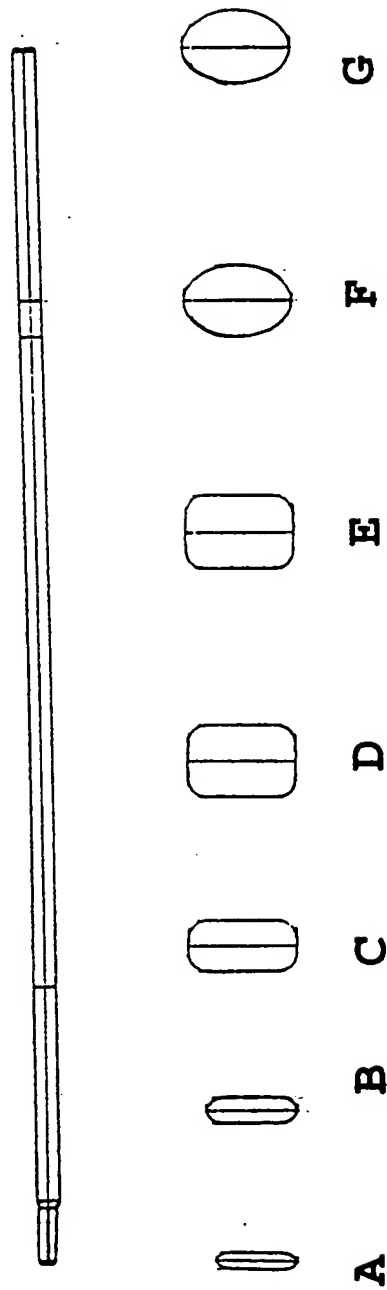
20 4.

A method according to claims 1-3, characterised in that the shell consists of at least two  
parts prior to being joined together.

5.

25 A method according to claim 4, characterised in that the shell has a thickness of from  
0.1 to 1 mm, preferably 0.35 mm.

**Fig. 1****Fig. 2**

**Fig. 3**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 98/00283

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A63B 59/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4644630 A (S. BLUM), 24 February 1987 (24.02.87) --	1-5
P, A	WO 9840132 A1 (FORD, B.D.), 17 Sept 1998 (17.09.98) --	1-5
A	US 5525290 A (W.J. CARPENTER), 11 June 1996 (11.06.96) -- -----	1-5

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 January 1999

Date of mailing of the international search report

25 -01- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM

Authorized officer

Johan Löfstedt

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

01/12/98

International application No.

PCT/NO 98/00283

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4644630 A	24/02/87	GB 2166361 A	08/05/86
WO 9840132 A1	17/09/98	CA 2199750 A	11/09/98
US 5525290 A	11/06/96	AU 2546692 A	18/11/93
		WO 9321014 A	28/10/93

**THIS PAGE BLANK (USPTO)**